

FUSE Connector

光伏保险丝连接器







Max 25A



1~3ms



UL94-V0



IP 68



UV Resistance








(€ & RoHS

- 1)Contact with drum-type crown spring, make electrical connection safety and fastness.
- 2)Self-locking between the female and male connector, installation conveniently and reliably.
- 3)Ratchet mechanism desigh to lock the nut cover, avoid being loosened after long term using.
- 4)Contact resistance less than $0.35m\Omega$ with Multi-Contact, less heating and low power consume.
- 5)Strong ageing resistance and UV resistance, suitable for use in multiple harsh outdoor environments.
- 6)It is suitable for various harsh outdoor environments such as deserts, lakes, seasides, and mountains.

Technical Data 技术参数:

Rated Voltage 额定电压	Max 1000V
Rated Current 额定电流	1~25A
Rated Breaking Capacity 额定分断电流	30KA@1000V
Time Constant 时间常数	1-3ms
Pollution Degree 污染等级	Class II
Protection Degree 保护等级	Class II
Fire Resistance 阻燃等级	UL94-V0
Rated Impulse Voltage 额定浪涌电压	6KV

Drawing 规格信息:

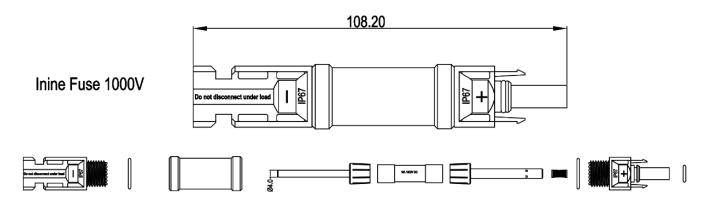

 $^{{\}tt *Customized\ options\ available,\ for\ more\ information,\ please\ contact\ us:\ info@leadergroup-cn.com}$

