



SY-CP4C系列:光伏板端连接器



CP4C系列连接器采用高品质绝缘耐候材料，可保障产品在户外长期安全使用。产品可适配 2.5平方到 10平方电线，具有更广的应用范围。较小的接触电阻和大电流传输能力保障了产品长期使用的可靠性。CP4C系列连接器 符合 IP68 额定标准，且能够工作在-40℃到 85℃ 极限环境。

Rated Voltage 额定电压	IEC 1500V/UL1500V
Certification 执行标准	IEC 62852; UL 6703
Rated Current 额定电流	25A/35A/40A/50A
Ambient 工作温度	-40℃ up to +85℃
Contact Resistance 接触电阻	≤0.25mΩ
Pollution Degree 污染等级	Class II
Protection Degree 保护等级	Class II
Fire Resistance 阻燃等级	UL94-V0
Rated Impulse Voltage 额定浪涌电压	16KV


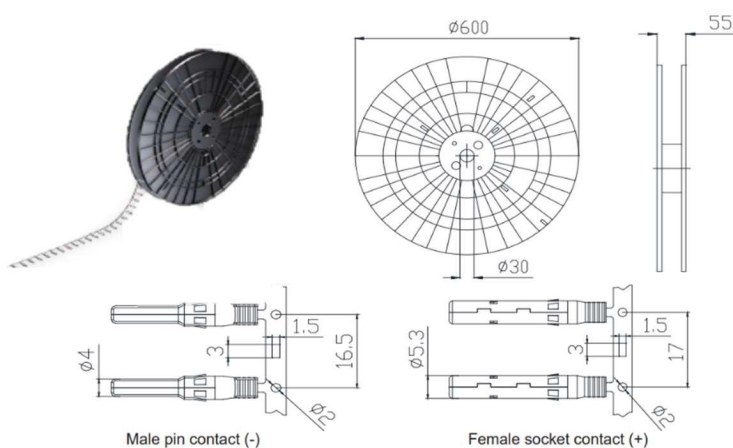


MODEL 型号	Voltage 电压	Current 电流	Cable OD	IP	Cable Spec
CP4C 2.5	1500V	25A	≦8mm	IP68	2.5mm ²
CP4C 46		35A/40A	≦8mm	IP68	4mm ² /6mm ²
CP4C 10		50A			10mm ²



SY-CP4C Series SolarConnector

SY-CP4C系列:光伏板端连接器

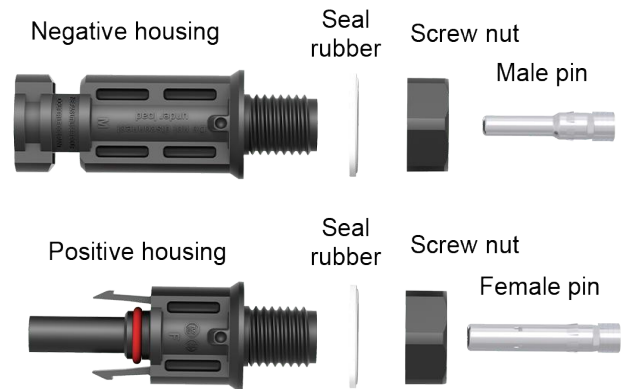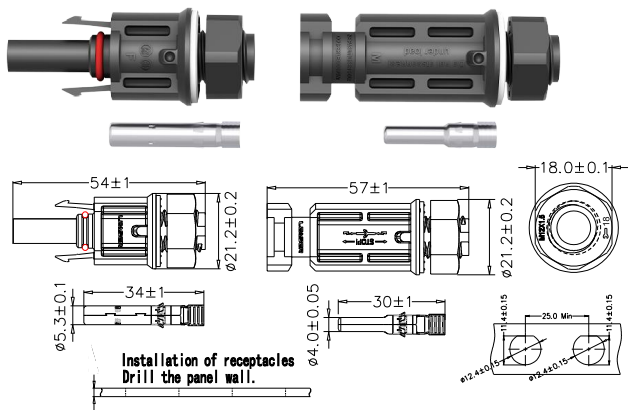


Male Connector Housing 连接器负极本体	Female Connector Housing 正极本体	Male Terminal 负极导电体	Female Terminal 正极导电体	Remark
☐ M6:CP4C-M8	☐ F6:CP4C-F8	☐ MU:CP4C-MU-2.5	☐ FU:CP4C-FU-2.5	
		☐ MU:CP4C-MU-46	☐ FU:CP4C-FU-46	
		☐ MO10:CP4C-MO-10	☐ FO10:CP4C-FO-10	

* Customized options available, for more information, please contact LEADER team: info@leadergroup-cn.com.

Male Connector Housing
连接器负极本体

Female Connector Housing
连接器正极本体

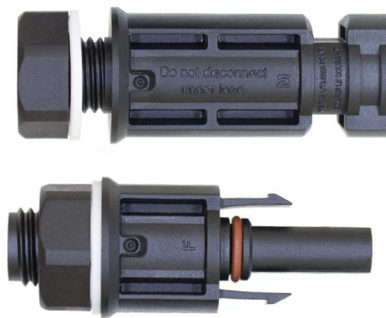

Type U Male Terminal
U 型 公端子



Type O Male Terminal
O 型 公端子



Type U Female Terminal
U 型 母端子



Type O Female Terminal
O 型 母端子



Package Info 包装信息:

Carton Dimension (cm)	Pack list	QTY	Gross Weight (kg)
59cm X 39cm X19cm	Male Housing	500 pcs	16kg
	Female Housing	500 pcs	
	Male terminal	500 pcs	
	Female terminal	500 pcs	
Remark: 500 pairs in one carton package			

